



LTL Number: 16779

Date: 10-01-2009

Catalog Number: 14100S-14 (#25)


Luminaire: Cast aluminum housing, spun specular reflector, frosted plastic enclosure, spun white enamel steel trim with white glass outer enclosure.

Lamp: 7 White LEDs

LED Power Supply: One Juiceworks LED Power Supply

Luminaire Efficacy: 44.5 Lumens/Watt

Luminaire Input Voltage	Input Current	Luminaire Watts	Power Factor	Wavelength in nm	Spectral Flux in mW/nm	Wavelength in nm	Spectral Flux in mW/nm
120.0VAC	0.1169A	14.01W	0.998	350	0.1105	610	11.4610
Radiant Flux mW	Luminous Flux lumen	Corr.Color Temperature K	Color Rend. Index Ra	360	0.0683	620	11.1170
2014.54	623.051	3156	82.1	370	0.0744	630	10.3510
Chroma x	Chroma y	Chroma u	Chroma v	380	0.0825	640	9.3621
0.4266	0.4011	0.2452	0.3458	390	0.0777	650	8.2329
				400	0.0893	660	7.0186
				410	0.1868	670	5.8281
				420	0.6134	680	4.7571
				430	1.7384	690	3.8140
				440	3.4161	700	3.0107
				450	5.6765	710	2.3565
				460	5.5260	720	1.8152
				470	3.8479	730	1.4003
				480	2.8450	740	1.1063
				490	2.5657	750	0.8202
				500	3.0566	760	0.6334
				510	4.2742	770	0.4846
				520	5.6731	780	0.4139
				530	6.9009	790	0.3052
				540	7.8632	800	0.2439
				550	8.6915	810	0.1956
				560	9.4422	820	0.1770
				570	10.0840	830	0.1582
				580	10.6760	840	0.1677
				590	11.2510	850	0.1497
				600	11.4910		

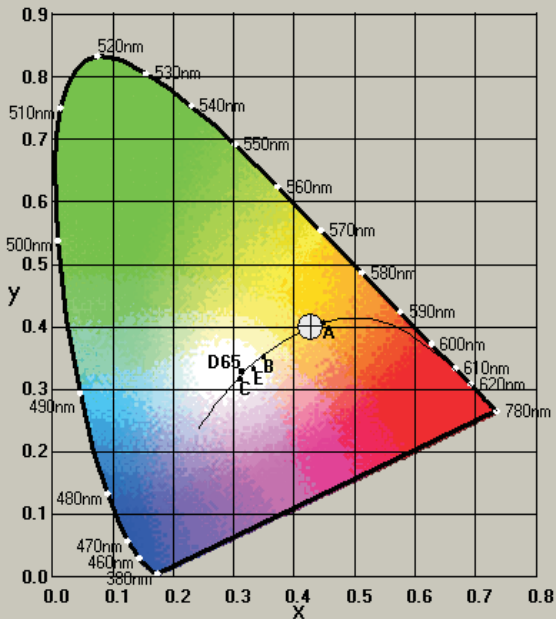

Chromaticity Diagram CIE 1931, 2 degree

